



# COWBOY

**PREMIUM COLLECTION**





# COWBOY

PREMIUM COLLECTION





**brown**



**fawn**



**olive**




# RICH TEXTURES

**baltic**


Highly distinguished by its smooth finish and ultra-glossy sheen. There is a subtle colour variance and tone to the leather that is typical in pure-aniline leathers.

**chocolate**



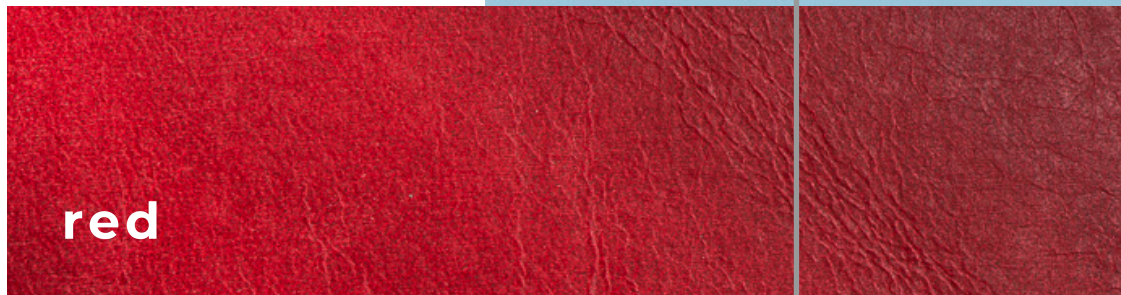

red

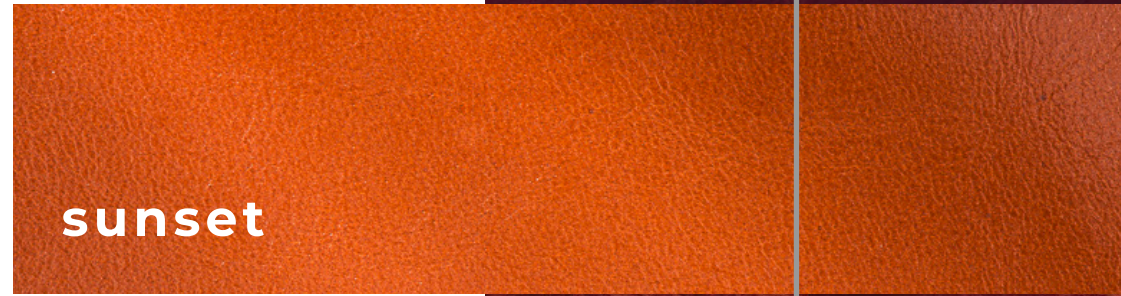

sunset



This is a modified “pull-up” leather: the color will lighten ever so slightly when the leather is upholstered, making it an ideal leather for those who do not want too much pull up effect.



paprika



green



I D E A L F O R  
C O M M E R C I A L  
U S E

COWBOY COLLECTION

caramel





shadow

silver fox

# EVERLASTING QUALITY





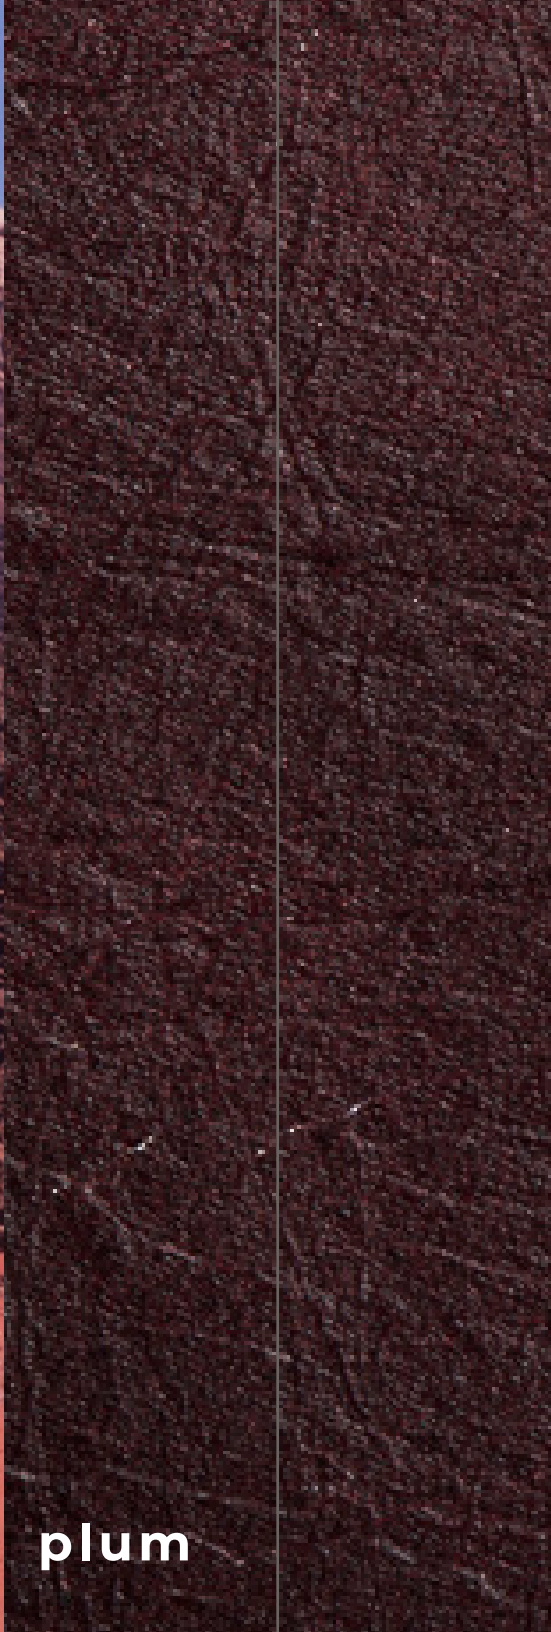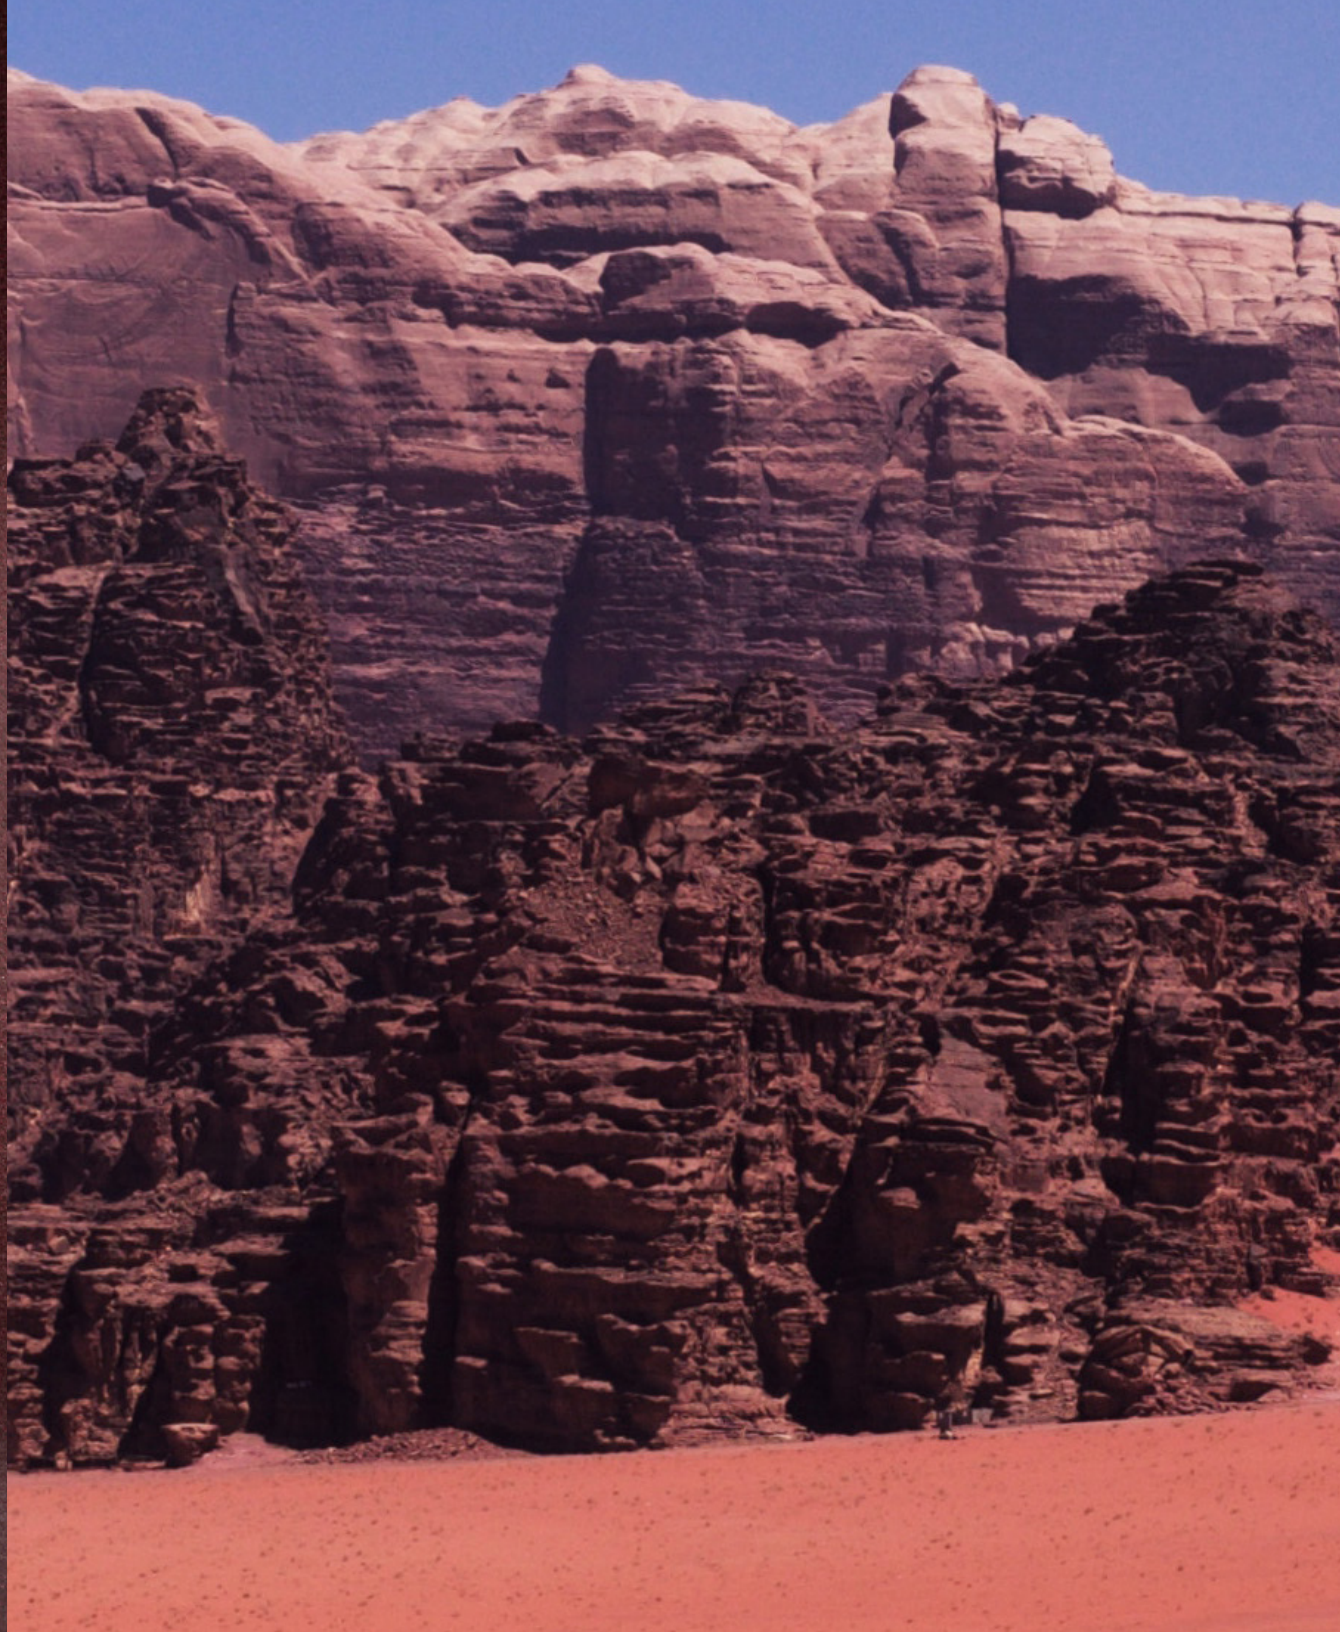

A V A I L A B L E I N

T H I S Y E A R S

H O T T E S T



C O L O U R S

berry


plum

platinum



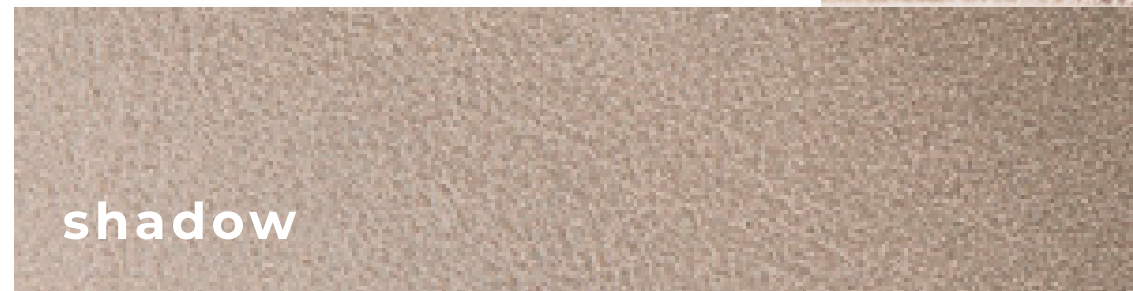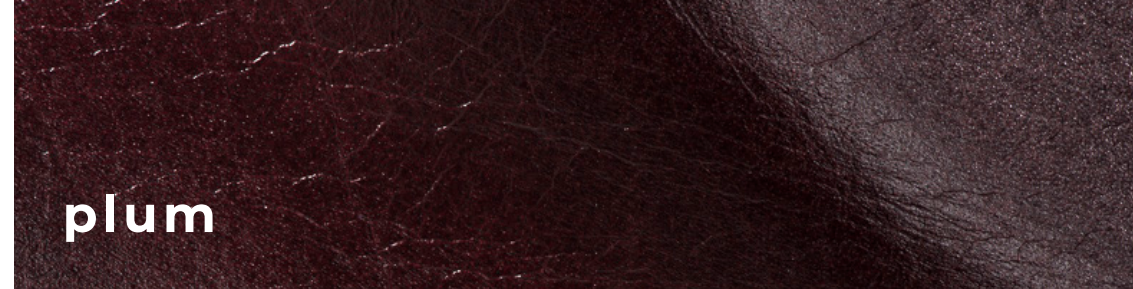



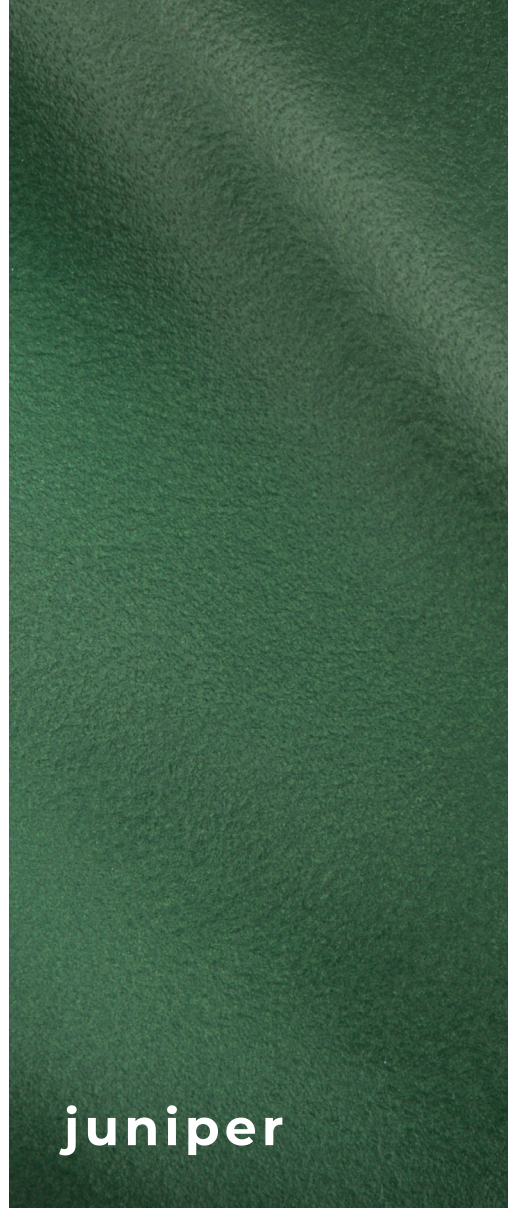

juniper



niagara





pompeii

COWBOY COLLECTION





shiraz



rose brown





**VIBRANT  
COLORS**

**sandy ridge**

**COWBOY** COLLECTION





Baltic



Blackberry



Chocolate



Green



Olive



Plum



Rose Brown



Silver Fox



Sunset



Berry



Brown



Coffee



Juniper



Paprika



Pompeii



Royal Blue



Shadow



Tropic



Black




Caramel




Fawn



Niagara




Platinum



Red



Sandy Ridge




Shiraz



Brass

*NOTE: Due to color variations on different monitors and color printers, before making exact color and texture matches, we recommend that you request an actual sample to ensure proper color representation as many monitors and printers cannot print colors accurately. CTL Leather is not responsible for color selections made from this lookbook.*



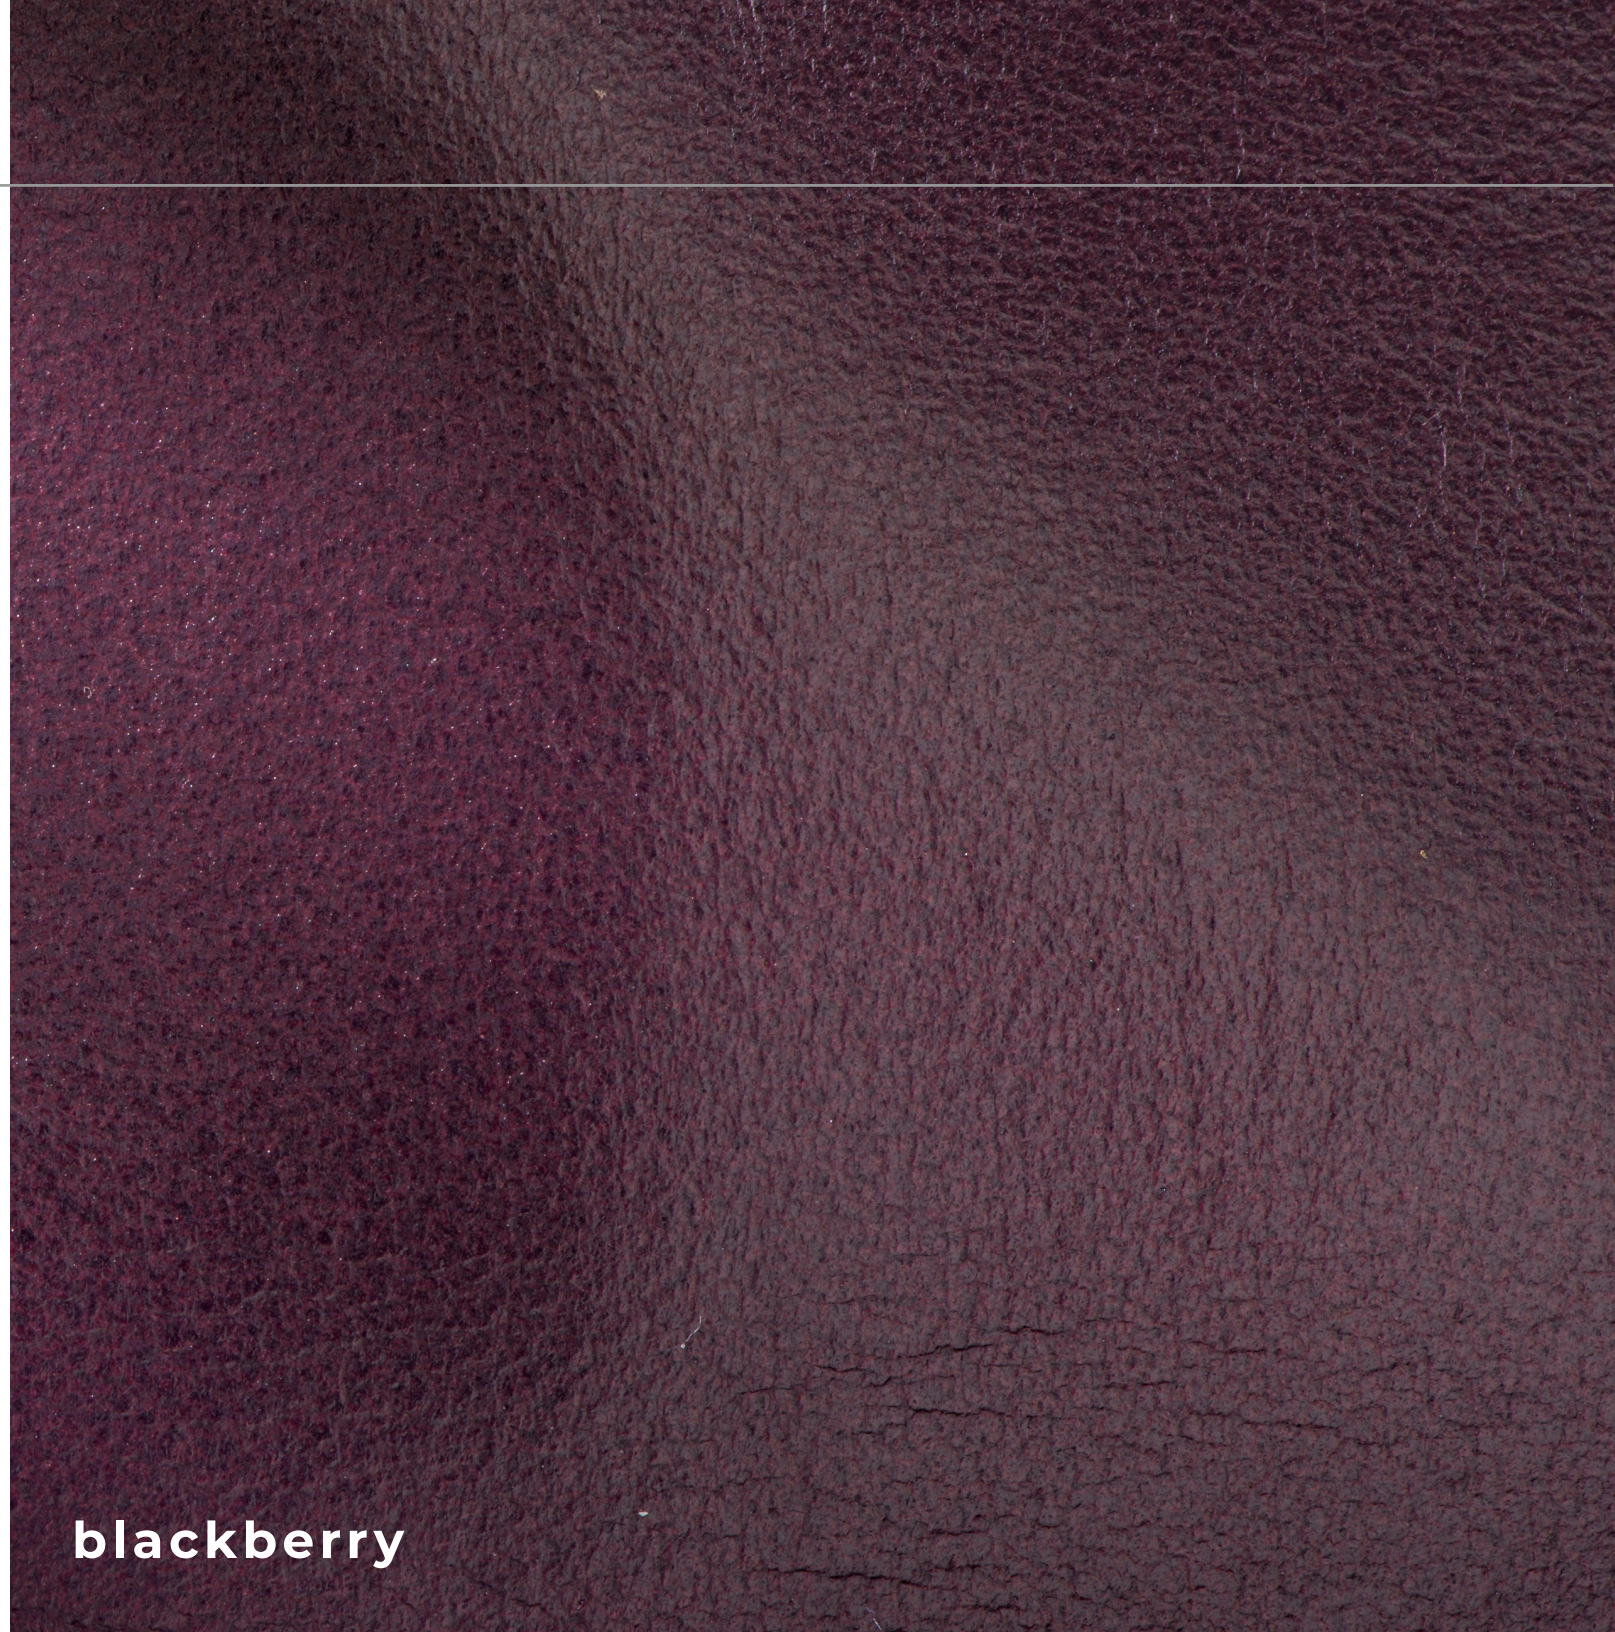

**blackberry**

**Average Hide Size**  
50 FT2 (4.65m2)

**Country of Origin**  
Italy

**Content**  
Solid, Wax Pull Up

**Finish**  
Semi-Aniline

**Raw Material**  
European

**Clean**  
Soft Cleaner

**Protect**  
Protection Cream

**Hide Type**  
Bovine

**Configuration**  
Whole Hide

**Grain**  
Buffed

Property	Test Method	Result
Average Thickness	ISO 2589	1.0 - 1.2mm
Tensile Strength	ISO 3376	> 10 N/mm to > 12 N/mm
Elongation at Break	ISO 3376	40 - 70 %
Tear Strength	ISO 3377	-1 30 - 40 N
Flexing Endurance (after 20,000 flex)	ISO 5402	> 20,000 Flex
Colour Fastness to Artificial Light (Xenotest 72 Hrs.)	ISO 105 B 02	2 (Blue Scale)
Colour Fastness to Rubbing (500 Dry Rubs, 100 Wet Rubs)	ISO 11640 , ISO 11640	4-5 > 3 (Grey Scale), 4 >3 (Grey Scale)
Ignitability BS 5852-1 (Cigarette)	BS 5852:1 EN 1021:1	Pass
Ignitability BS 5852-2 (Match)	BS 5852:2 EN 1021:2	Pass
California Technical	Cal Tech Bulletin 117	Class 1
Cigarette Ignition Resistance	UFAC/NFPA 260	Class 1
Boston Fire Dept	BFD IX-I	Pass
Wyzenbeek - (Oscillatory Cylinder Method) @ 54,000 cycles	ASTM D 4157.07	Pass
Ignitability BS 5852-5 (Wooden Crib)	BS 5852-5	Treatable