




CTL LEATHER  
Your Partner in Design

# BOMBAY

**CLASSIC LEATHER**

Inspired by the bustling streets of  
India, the Bombay collection  
boasts versatility — great for  
a variety of applications.

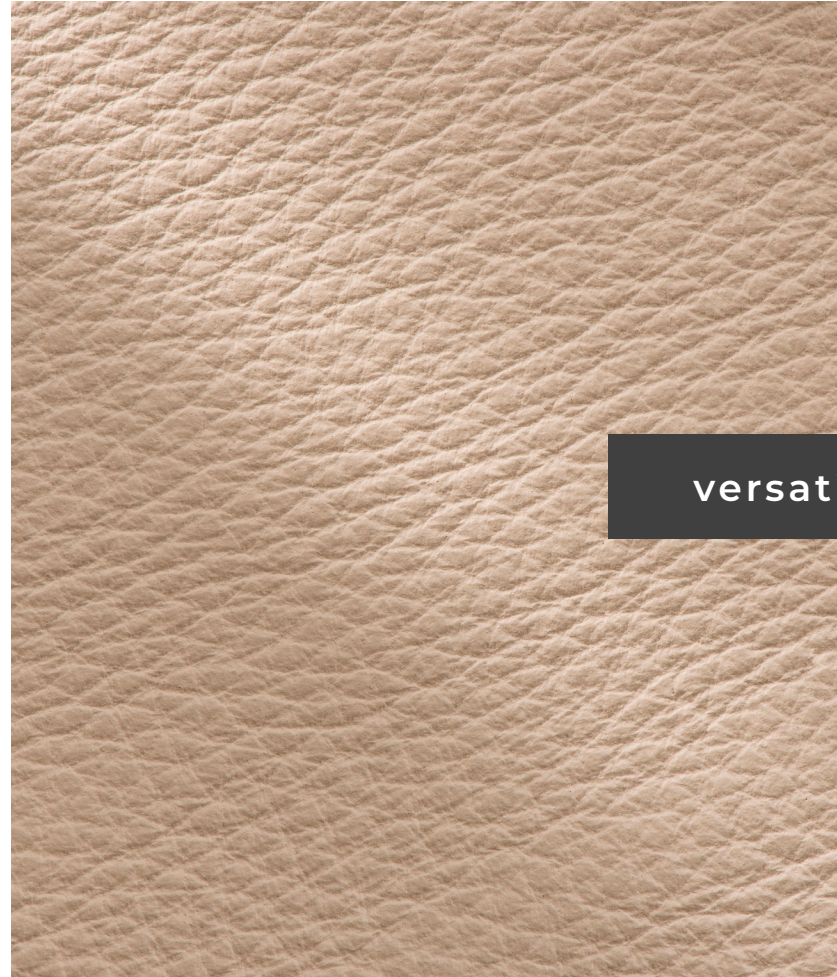

versatile in use

wheat



E X C E L L E N T

D U R A B I L I T Y


L O W

M A I N T E N A N C E

ashphalt



**clove**

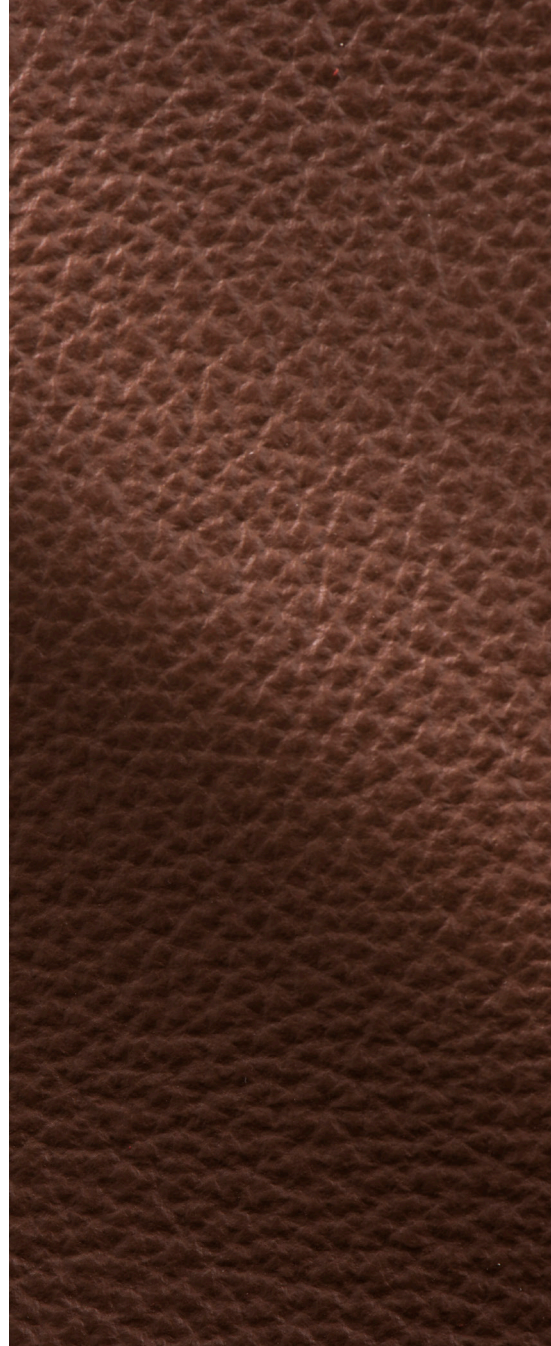


**doe**

An attractive, economical corrected grain leather, with a plain pigmented finish that offers ideal light fastness, stain protection and a soft feel.




**cordovan**

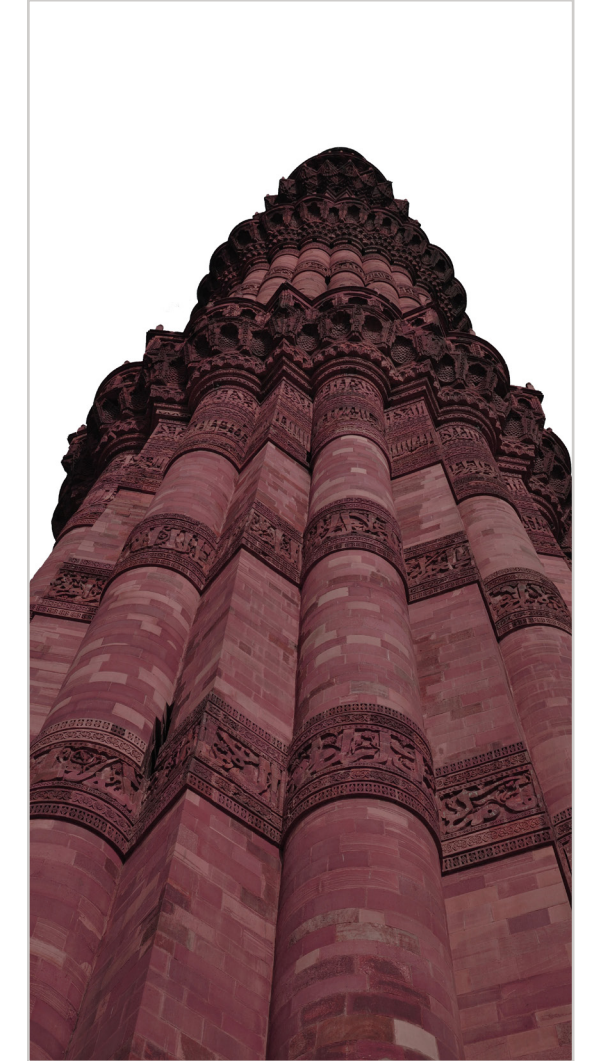


**IDEAL LIGHT  
FASTNESS**




**phantom**




**blueberry**



**marina**

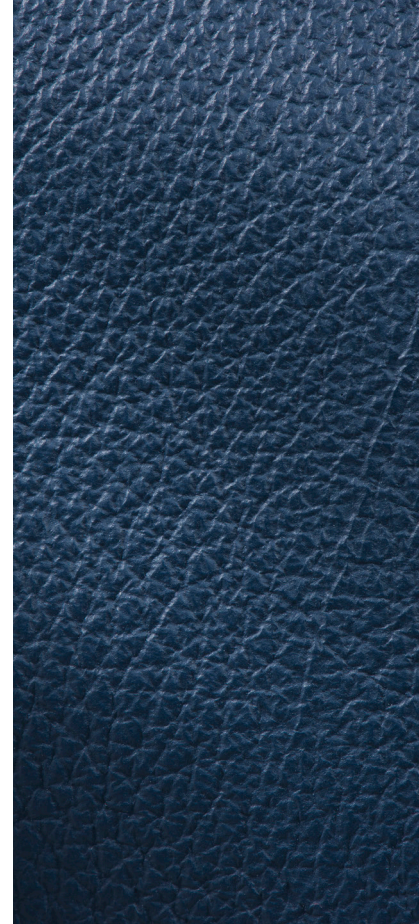


**marina**

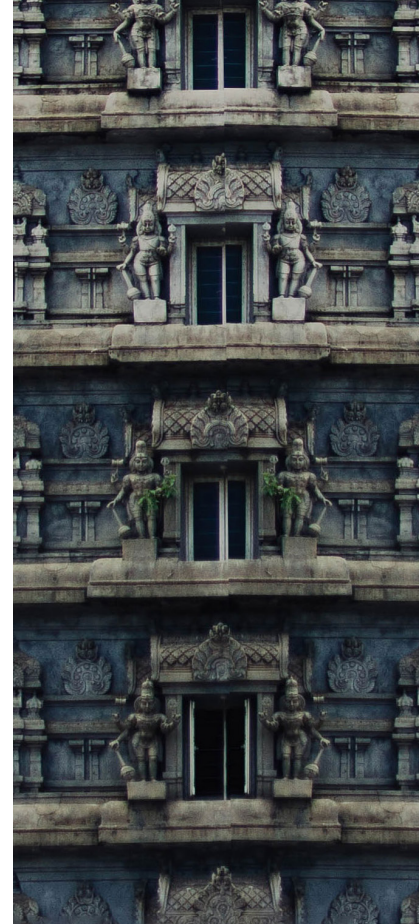



**ash**



**cloud**

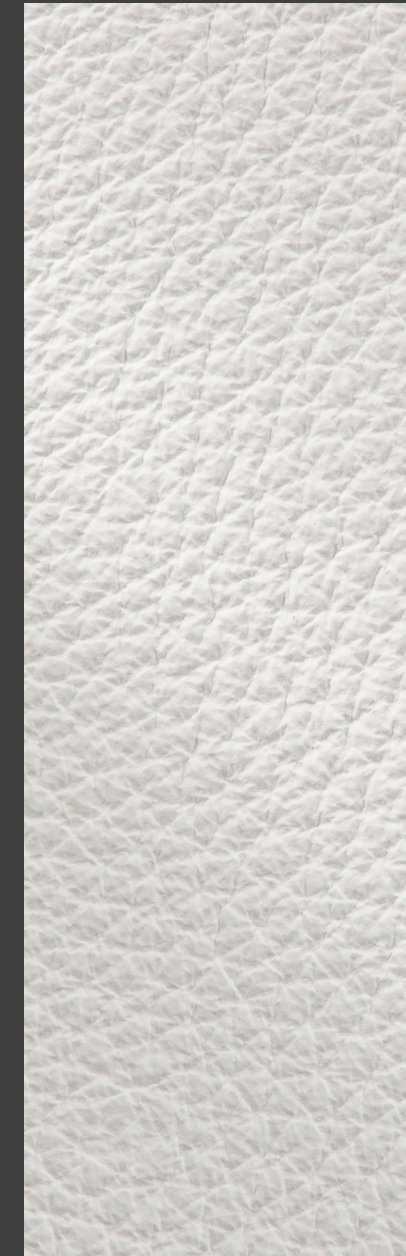


**pigeon**

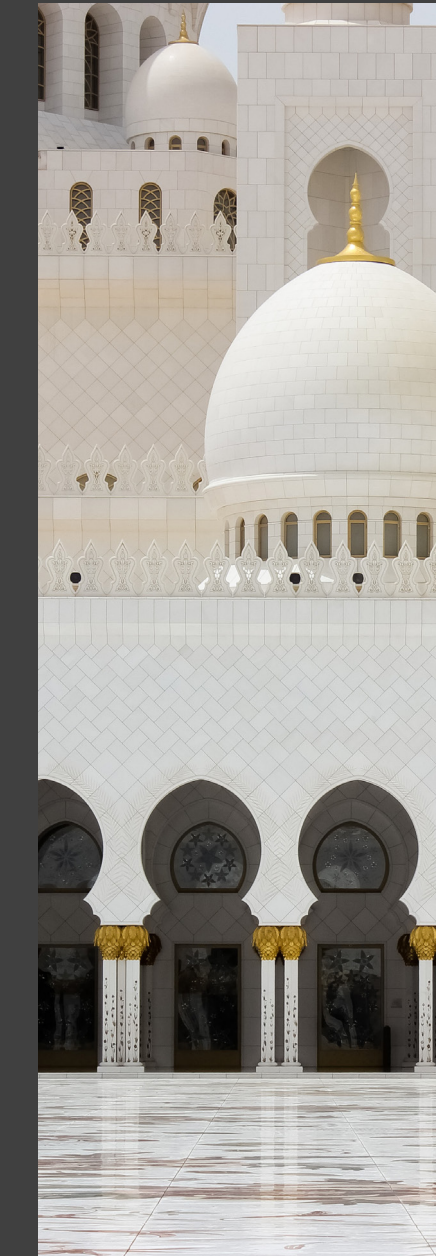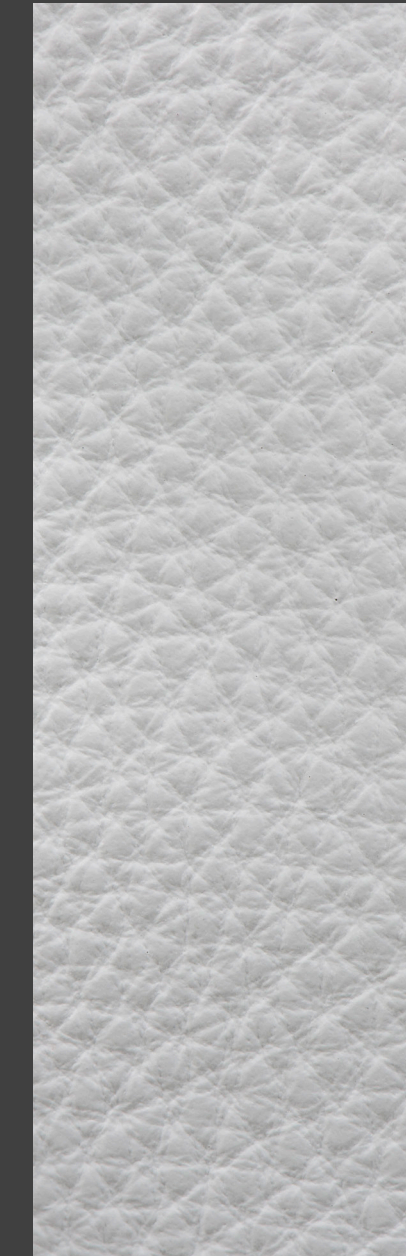


**EXCELLENT WEAR**

Excellent durability with minimal maintenance. This top coated leather is very durable and will provide excellent wear characteristics for high traffic areas, if maintained properly. Suitable for domestic and general contract use.


Property	Test Method	Result
Average Thickness	ISO 2589	0.8 - 1.0mm
Color Fastness to Artificial Light	ISO 105 B02	min 4 (Blue Scale)
Finish Adhesion	ISO 11644	min 2 N/10mm

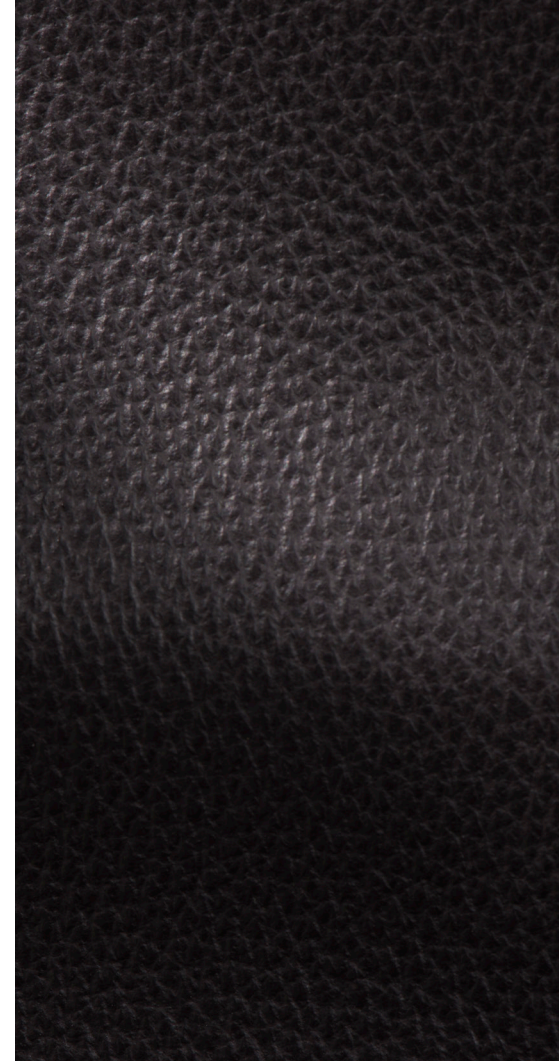

**bison**

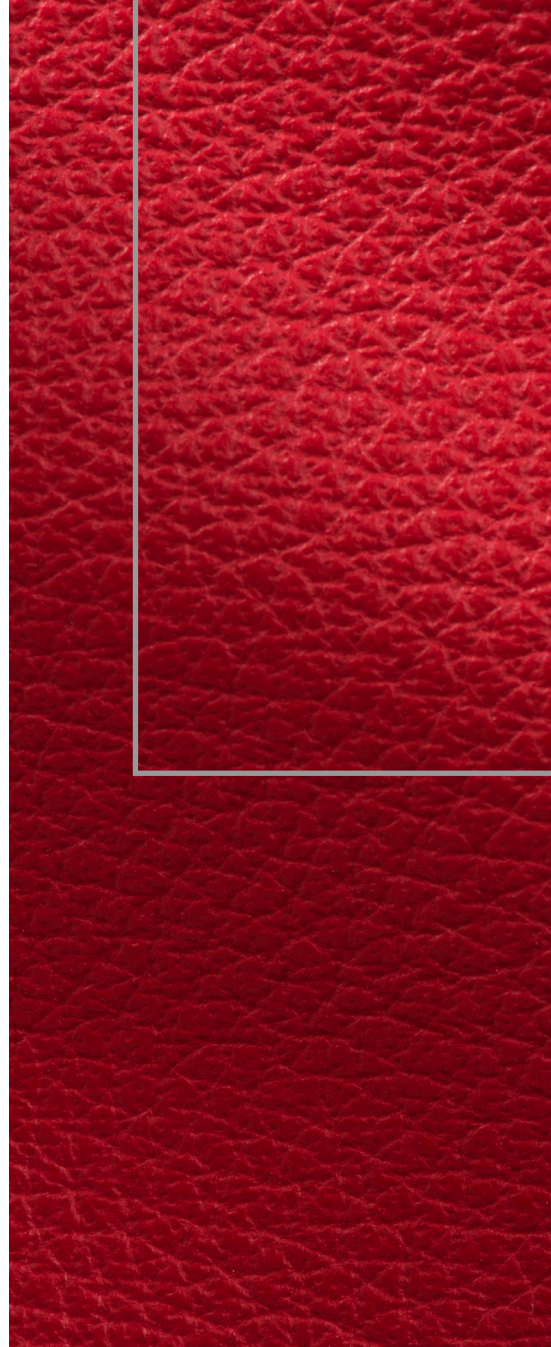

**scarlet**

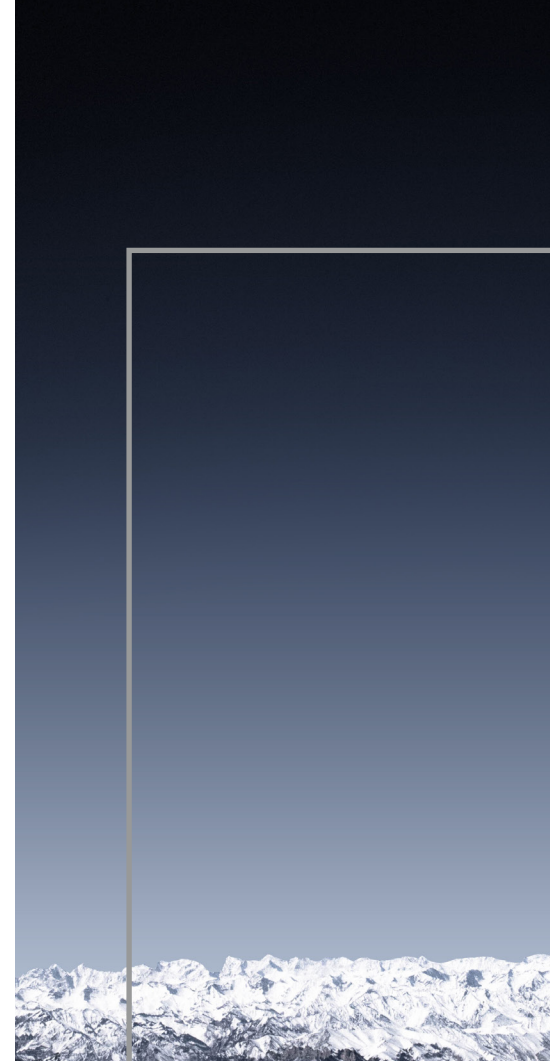


**blueberry**



**phantom**

turtle

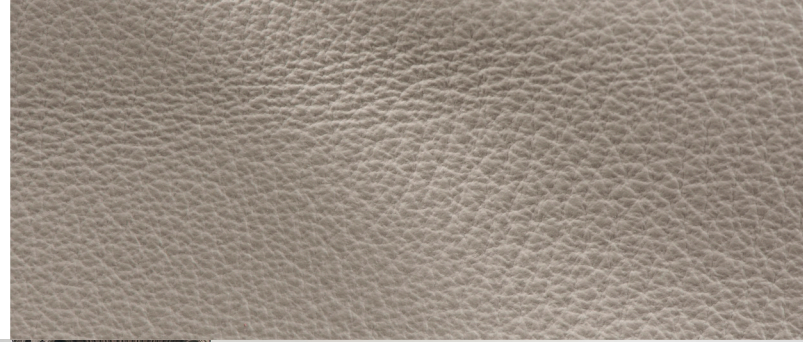

linen

# PROPERTIES

Property	Test Method	Result
Average Thickness	ISO 2589	0.8 - 1.0mm
Color Fastness to Artificial Light	ISO 105 B02	min 4 (Blue Scale)
Color Fastness to Rubbing (500 Dry, 250 Wet, 80 Perspiration)	ISO 11640	4 (Grey Scale), 3-4 (Grey Scale), 3-4 (Grey Scale)
Finish Adhesion	ISO 11644	min 2 N/10mm
Tear Strength	ISO 3377-2: 2002	min 20N
Flexing Endurance (min 50,000 cycles)	ISO 5402	No finish cracks at 50,000 cycles
Water Spotting	ISO 15700	GSR 3 (no residual halo or blistering of finish)
Cold Crack	ISO IUP 29: 1996	No finish cracks -15°C
Determination of pH	ISO 4045: 2008	min 3.2
Ignitability BS 5852-0 (Cigarette)	BS 5852:1979	Pass
Ignitability BS 5852-1(Match)	BS EN 1021-1-2:2006	Pass
Ignitability BS 5852-5 (Wooden Crib)	BS 5852-5	Pass
California Technical Bulletin	CAL 117:2003	Class 1



turtle



wheat



linen



# STAIN PROTECTION


Smaller hide sizes should be taken into account when developing patterns with this article




Ash



Asphalt




Bison



Blueberry




Cloud



Clove




Cordovan




Doe




Linen



Marina



Phantom



Pigeon



Scarlet



Turtle



Wheat

---

**Content**  
Top Grain, Embossed  
(Madras)

**Finish**  
Solid, Pigmented

**Raw Material**  
Buffalo

**Average Hide Size**  
35 sq ft

**Clean**  
Soft Cleaner

**Protect**  
Protection Cream

*NOTE: Due to color variations on different monitors and color printers, before making exact color and texture matches, we recommend that you request an actual sample to ensure proper color representation as many monitors and printers cannot print colors accurately. CTL Leather is not responsible for color selections made from this lookbook.*